

# TRACOM FOB-FTTX-E FIBER OPTIC ENCLOSURE

P-FOB-FTTX-E-P2




A fiber optic enclosure featuring space for one SC SIMPLEX or LC DUPLEX adapter with flange (SC Mount), or two SC SIMPLEX or LC DUPLEX adapters without flange (no flange, SC Mount), as well as space for two splices. It allows routing up to four optical cables or ready-made patch cords with a diameter of up to 5 mm (one entry by default, three additional entries available after removing the covers).

This fiber optic enclosure is a versatile solution for telecommunication installations and server rooms, especially in locations with limited space, where a large number of fibers at a single point is not required. It has an IP31 protection rating.

**The set includes:**

- Mounting screw

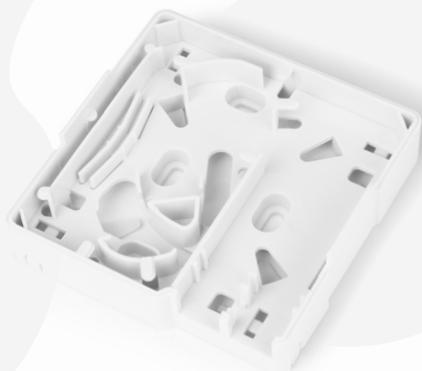

**Product Information**

Product name	IP rating	Dimensions [H×W×D] [mm]
Tracom FOB-FTTX-E fiber optic enclosure	IP31	85 × 85 × 26