




ZXESM R311 Lithium-ion Battery

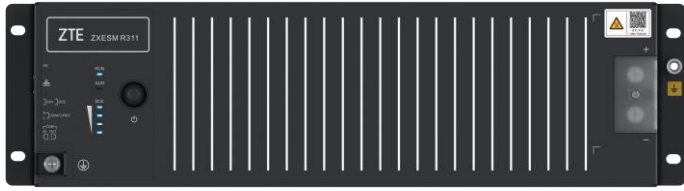

ZXESM R311

Introduction

ZXESM R311 applies the advanced control management theory to its BMS system to implement real-time parameter detection, over-current/over-voltage protection, and multiple groups of parallel operation. With Lithium battery- Power -EMS structure, which is connected to the power supply system and EMS, the battery is upgraded from a dumb device to a remotely controllable management unit to ensure the safety of sites power backup and reduce routine O&M costs.

Product Features

- 3U height
- Supporting 19" rack or cabinet installation
- Maximum charging and discharging current: 100 A
- Supporting parallel operation of up to 32 sets of batteries
- Multiple communication interfaces, supporting IP network
- iLock technology^① and buzzer alarm for anti-theft
- GPS function (optional)

Technical Parameters


Item	Parameters
Rated capacity	100Ah(C ₅ ,25°C)
Nominal voltage	48V
Cathode material	LiFePO ₄
Charge voltage	52.5Vdc~54Vdc
Max. charge/discharge current	100A/100A
Cell operating temperature	charging: 0°C~60°C, discharging: -20°C~+65°C
Storage temperature	0°C~+40°C
Dimensions(W*D*H mm)	442×400×130.5(excluding mounting ear, handle, terminal)
Net weight	≤43kg
Self discharge@25°C	≤5% (90 days storage)
Methods for detecting battery theft	gyroscope, anti-theft cable, communication
Altitude	0m~4000m

① ZXESM R311 can lock the battery output automatically when battery is stolen, and should be unlocked by authorized operators. There are multiple methods for detecting battery theft, including gyroscope, anti-theft cable, communication.




Item	Parameters
Relative humidity	5%RH~95%RH
Atmospheric pressure	70kPa~106kPa
Protection grade	IP40
Design life	15 years(25°C)
Cycle life	3500 cycles@80%DOD, 35°C
Max. quantity of parallel connection	32
Communication protocol	Modbus, SNMP
Interface	Dry Contact*2, RS485, CAN, FE
Certification	UN38.3, CE

Discharge curve, 35 °C

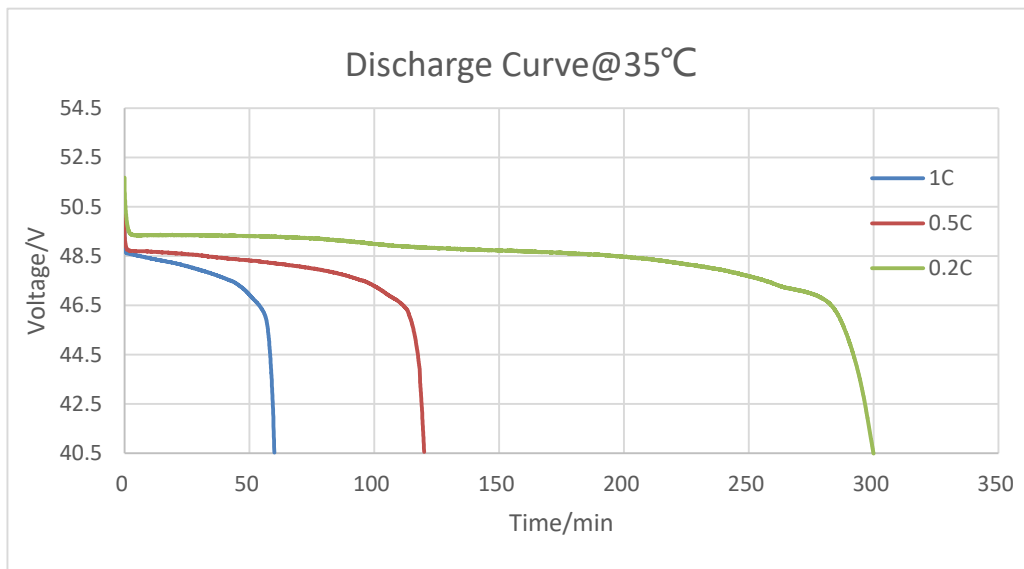

Charge curve, 35 °C

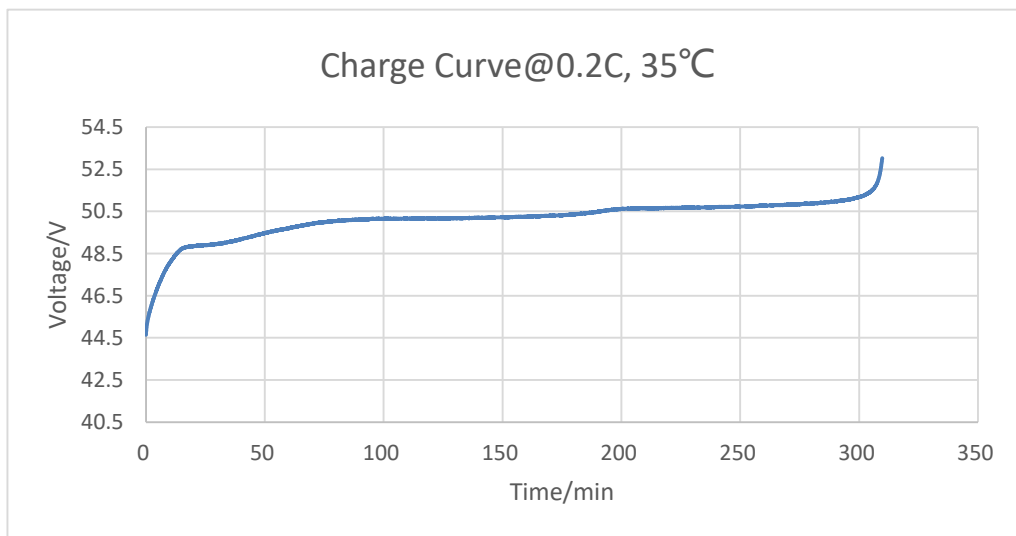

ZTE CORPORATION

NO. 55, Hi-tech Road South, Shenzhen, P. R. China
Postcode: 518057
Web: www.zte.com
Tel: +86-755-26770000
Fax: +86-755-26771999

